


Case File No. 16-0005



NOTES:


- REFER TO SHEET C1.3, GRADING AND DRAINAGE PLAN, FOR GENERAL NOTES.
- MINIMIZE DISTURBANCE TO SITE AND PROTECT EXISTING VEGETATION AND SITE FEATURES (CURBS, WALKS, PAVEMENTS, OVERHEAD AND UNDERGROUND UTILITIES, BOLLARDS, FENCING, ROADWAYS, ETC.) WHICH ARE TO REMAIN.
- REPAIR OR REPLACE EXISTING PROPERTY AND SITE FEATURES, INCLUDING GRASSES AND VEGETATION, WHICH IS TO BE DAMAGED BY THE WORK, TO OWNER'S SATISFACTION AND AT NO ADDITIONAL COST TO THE OWNER.
- VISIT THE SITE PRIOR TO RECORDING, BE FAMILIAR WITH ACTUAL CONDITIONS IN THE FIELD. EXTRA COMPENSATION WILL NOT BE ALLOWED FOR CONDITIONS WHICH COULD HAVE BEEN DETERMINED OR ANTICIPATED BY EXAMINATION OF THE SITE, THE CONTRACT DOCUMENTS AND THE INFORMATION AVAILABLE PERTAINING TO EXISTING SOILS, UTILITIES AND OTHER SITE CHARACTERISTICS.
- THE CONTRACTOR SHALL HIRE THE SERVICES OF A UTILITY LOCATION COMPANY TO LOCATE ALL PRIVATELY OWNED UTILITIES THAT MAY BE DISTURBED BY CONSTRUCTION OPERATIONS.

LEGEND

- CONCRETE PAVEMENT REMOVALS
- BITUMINOUS PAVEMENT REMOVALS
- UTILITY REMOVALS
- TREE REMOVALS
- SAWCUT
- REMOVALS KEY NOTE
- PROPERTY LINE

KEY NOTE LEGEND

- REMOVE CONCRETE PAVEMENT TO NEAREST JOINT
- REMOVE BITUMINOUS PAVEMENT
- REMOVE CONCRETE WALL
- REMOVE STORM SEWER
- REMOVE STORM SEWER STRUCTURE
- REMOVE TREE
- REMOVE PLAYGROUND STRUCTURE / EQUIPMENT
- REMOVE PLAYGROUND MATERIAL (BRUSH, EDGING, ETC.)
- SAWCUT
- PROTECT CONCRETE PAVEMENT
- PROTECT CONCRETE CURB AND GUTTER / VALLEY GUTTER
- PROTECT BITUMINOUS PAVEMENT
- PROTECT TRAFFIC CONTROL SIGN AND POST
- PROTECT BOLLARD AND FOOTING
- PROTECT RETAINING WALL
- PROTECT STORM SEWER
- PROTECT STORM SEWER STRUCTURE
- PROTECT TREE
- PROTECT BENCHES
- PROTECT PLAYGROUND STRUCTURE / EQUIPMENT
- PROTECT PLAYGROUND MATERIAL (BRUSH, EDGING, ETC.)
- SALVAGE BENCHES - RE-INSTALL WHERE SHOWN ON SHEET C1.21
- REFER TO ARCHITECTURAL PLANS FOR TREATMENT
- REFER TO MECHANICAL PLANS FOR TREATMENT

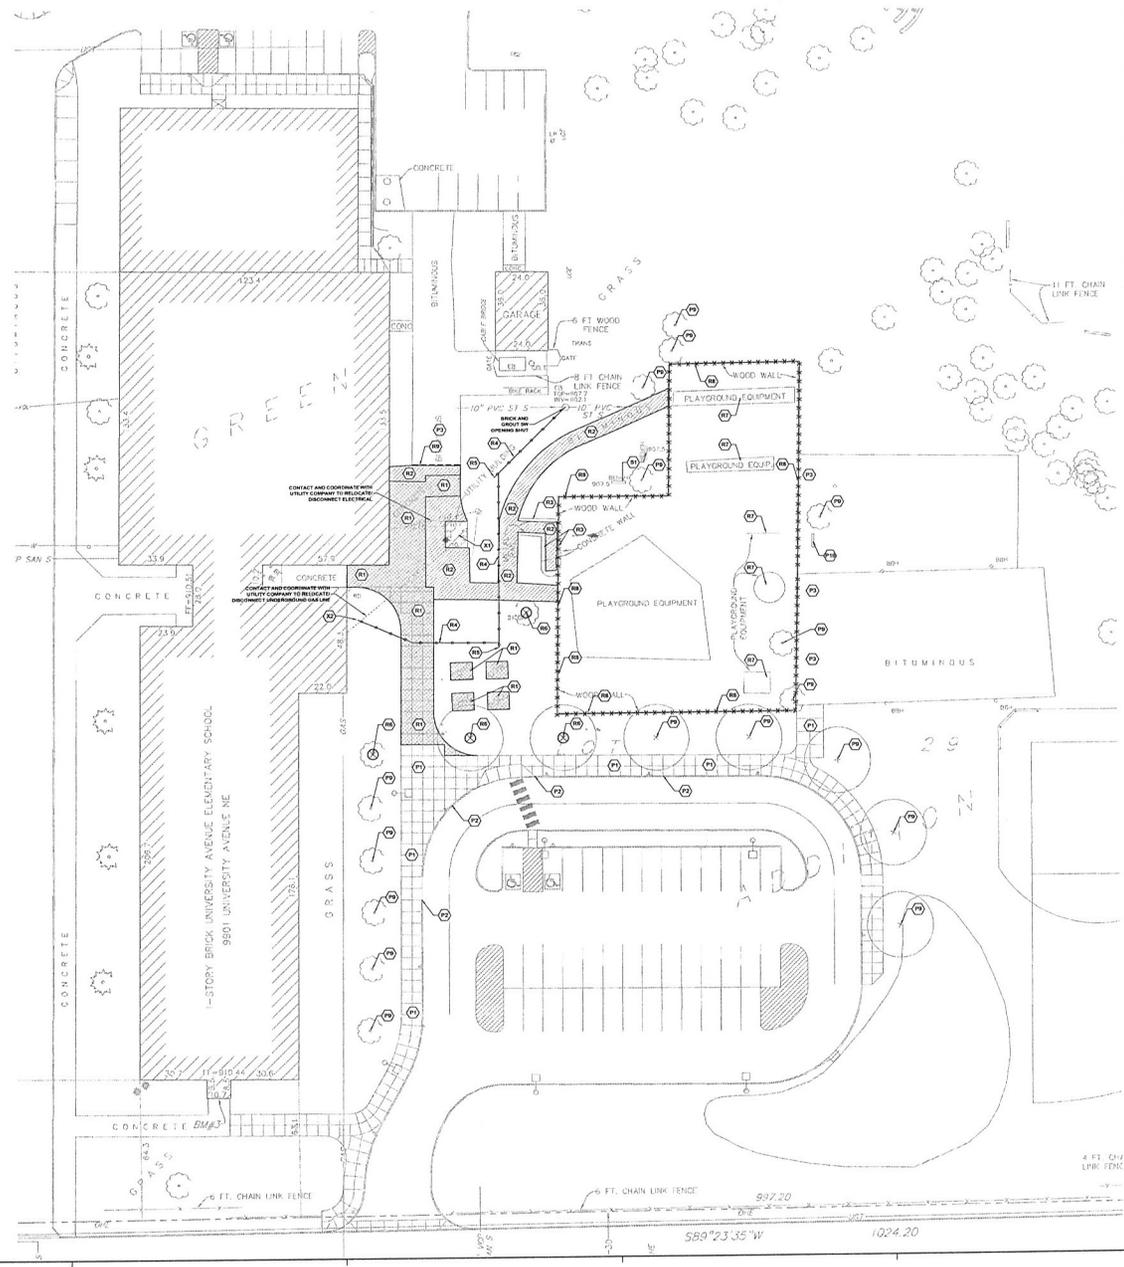

UNIVERSITY AVE. ELEMENTARY SCHOOL CLASSROOM ADDITION AND ALTERATIONS
 ANOVA HENNING SCHOOL DISTRICT NO. 11
 BLAINE, MINNESOTA

SIGNATURE / SEAL

I hereby certify that this plan, specification or report was prepared by me or under my direct supervision and that I am a duly Licensed Professional Architect under the laws of the State of Minnesota.

JAY B. POMEROY
 TREE OR REMOVAL SIGN
 4820218
 23543
 LICENSE NUMBER

REVISIONS

NO.	DATE	DESCRIPTION

DRAWN BY

MLEB

CHECKED BY

JRP

ISSUED FOR

CONSTRUCTION DOCUMENTS

DATE

01/28/2016

SHEET NAME

REMOVALS PLAN

ATS&R PROJECT NO.

1552


SHEET NUMBER

C1.11



SECOND FLOOR ROOM FINISH SCHEDULE									
NO	ROOM NAME	FLOOR	WALL	CEILING	DOOR	FINISH	NOTES		
263A	CORRIDOR	---	---	---	---	---	---		
263B	STAIR	---	---	---	---	---	---		
264B	STAIR	---	---	---	ACT	---	9		
A211	CLASSROOM	---	---	---	---	---	---		
A212	CLASSROOM	---	---	---	---	---	---		
A213	CLASSROOM	---	---	---	---	---	---		
C202	TRAIL	PCT	PCT	CMU	PCT	WALL	---	4	
C203	JANITOR	CMC	VB	CMU	PT	EXP	---	---	4
C204	BOYS	PCT	PCT	CMU	PCT	WALL	---	---	4
C205	WASH AREA	PCT	PCT	CMU	PCT	WALL	---	---	4.8
C206	CORRIDOR	PCMC	PCT	CMU	PCT	ACT	---	---	6.8
C207	WASH AREA	PCT	PCT	CMU	PCT	WALL	---	---	4.8
C208	GARLS	PCT	PCT	CMU	PCT	WALL	---	---	4
C209	CORRIDOR	PCMC	PCT	CMU	PCT	WALL	---	---	3
C210	CLASSROOM	PCMC	VB	CMU	PT	ACT	---	---	27.8
C211	CLASSROOM	PCMC	VB	CMU	PT	ACT	---	---	22.8
C212	METALLEGE	CMC	---	CMU	---	EXP	---	---	---
C213	FLA	CPY	PCT	CMU	PCT	ACT	---	---	23.6, 7.8
C214	CLASSROOM	PCMC	VB	CMU	PT	ACT	---	---	27.8
C215	CLASSROOM	PCMC	VB	CMU	PT	ACT	---	---	27.8
C216	CORRIDOR/STAIR	PCMC	PCT	CMU	PCT	ACT	---	---	8.0
C217	CLASSROOM	PCMC	VB	CMU	PT	ACT	---	---	32.8
C218	SPECIAL ED	VF	VB	CMU	PT	ACT	---	---	---
C219	SPECIAL ED	VF	VB	CMU	PT	ACT	---	---	7
C220	WET ROOM	---	---	---	---	---	---	---	---
C221	LOBBY	---	---	---	---	---	---	---	9

- ROOM FINISH SCHEDULE NOTES:
1. PAINT SIZES COLUMN WHERE APPLICABLE TO VIEW
 2. REFER TO REFLECTED CEILING PLANS FOR MESH CEILING AT EXTERIOR WINDOW
 3. PCT FINISH TO BE 5'-6" AFF REFER TO 1(A)11 FOR TILE PATTERN
 4. PCT FLOOR TO 1'-0" F.F.E.
 5. REMOVABLE CARPET MAT BY OWNER. COORDINATE DIMENSIONS AT AND DOOR UNDERCUT W/ MAT BATH.
 6. PROVIDE 1/4" VINYL MESH OVER MESH LUGGAGE BASK.
 7. PROVIDE WINDOW BLINDS AT EXT. WINDOWS
 8. PROVIDE ACCENT TRIM COLOR AT WALLS AND SPOUTS. REFER TO INTERIOR LOOKING
 9. FINISHES SCHEDULED FOR NEW CONSTRUCTION. EXISTING ADJACENT FINISHES TO REMAIN
 10. PROVIDE NUMBER FINISH, NOTES AND LAMPING AT 2/26

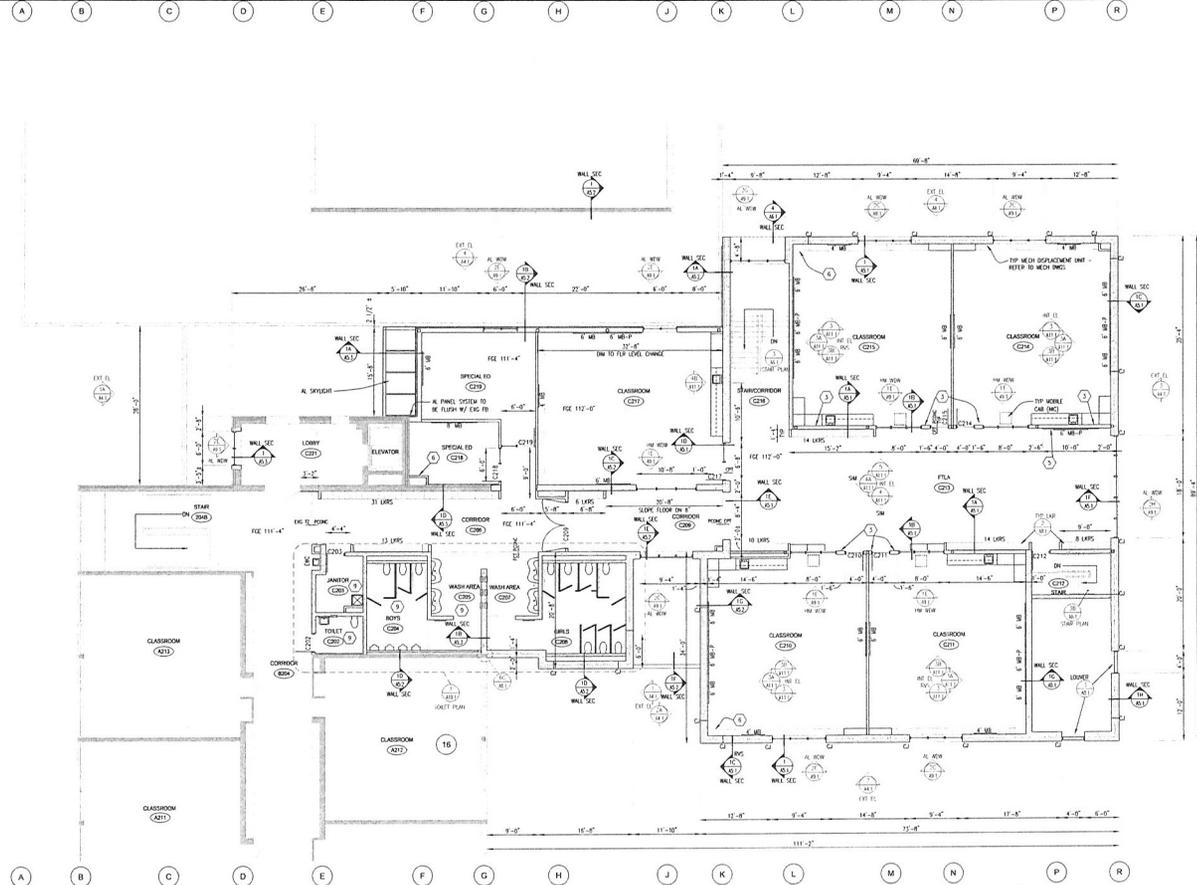

SECOND FLOOR DOOR SCHEDULE						
NO	APPROX. SIZE	DOOR	FRAME	HEAD	SW	NOTES
C202	2'-0" x 7'-2" x 3'-0"	HD	0	NM	SW/1	S2
C203	2'-0" x 7'-2" x 3'-0"	HD	0	NM	SW/1	S2
C206	0'-0" x 10'-0" x 3'-0"	HD	X	NM	SW/1	BT
C210	2'-0" x 7'-2" x 3'-0"	HD	X	NM	SW/1	S2
C211	2'-0" x 7'-2" x 3'-0"	HD	X	NM	SW/1	S2
C212	2'-0" x 7'-2" x 3'-0"	HD	X	NM	SW/1	S2
C214	2'-0" x 7'-2" x 3'-0"	HD	X	NM	SW/1	S2
C215	2'-0" x 7'-2" x 3'-0"	HD	X	NM	SW/1	S2
C217	2'-0" x 7'-2" x 3'-0"	HD	X	NM	SW/1	S2
C218	2'-0" x 7'-2" x 3'-0"	HD	0	NM	SW/1	S2
C219	2'-0" x 7'-2" x 3'-0"	HD	0	NM	SW/1	S2

- DOOR SCHEDULE NOTES:
1. EXTERIOR DOOR = FINIC FINISHES WITH VET. COSS.
 2. EXTERIOR DOOR = FINIC FINISHES, EXP. ONLY, NO OUTSIDE TRIM
 3. EXISTING EXTERIOR MESH IN EXTERIOR SPOUTS
 4. INTERIOR DOOR = FINIC FINISHES
 5. PROVIDE MESHED HOLD-OPEN DEVICES CONNECTED TO EXC. FIRE ALARM AND SECURITY SYSTEM
 6. PROVIDE DOOR UNDERCUT 3/4" CLEAR UNDER FLOOR FINISH
 7. PROVIDE DOOR GRABBERS AT HEAD, HAND AND DOOR SCALS AT 2/1
 8. PROVIDE RIGID IN FOR DOOR ALARM AND FUTURE CARD READER REFER TO ELEC DWG AND DET. 38/19/1
 9. PROVIDE COATED
 10. PROVIDE MANUAL MECHANICAL HOLD-OPEN

FLOOR PLAN NOTES

1. 8" GFI FROST WALL BELLOW - REFER TO STRUCT DWG.
2. FACE OF NEW WALL TO BE FINISH W/ EX. SURFACE
3. 5/8" GIB OVER 1/2" STUDS AT 14" OC AND SOUND BATS FROM FLOOR TO DOOR HEAD
4. 5/8" GIB OVER FORMING C'S AT 14" OC FROM FLOOR TO UNDERSIDE OF DOOR ABOVE
5. PROVIDE FINISH OVER GIB STUD WALL - 5/8" GIB OVER 7/8" FORMING C'S AT 14" OC FROM FLOOR TO 5" MIN ABOVE GIB BATT (GIB AT ENDS) - PROVIDE 8" PCT BASE AT FINISH AREA AND BRAG FOR 1/4" - REFER TO DET. 38/19/1
6. WALL OR PART CHASE - 5/8" GIB OVER 1 1/2" STUDS FROM FLOOR TO 4" MIN ABOVE GIB
7. WALL EXC. GIB W/ 8" GIB - MATCH ALL COORDING
8. SMOOTH EXC. CONC. SLAB IS REQ. FOR NEW FLOOR - PATCH CONC. TO MATCH
9. ALL CMU AT OTHER EXC. CONC. FLOOR SLAB AT RUG. C202, C203, C204 & C205 TO BE LIGHTWEIGHT CMU

GENERAL NOTES

1. ALL EXPOSED SURFACE CMU CONFORM TO THE "BALCONED" CMU
2. ALL WINDOW CASI TO BE 6" WIDE UNLESS OTHERWISE NOTED OR INDICATED
3. REFER TO SHEET BLANKS FOR INTERIOR & EXTERIOR EXPANSION & CONTRACTION JOINT DETAILS
4. REFER TO 1(A)11 FOR TYPICAL DIMENSIONS (MARKED DIMENSIONS) CHANGEOVER (OR) INDICATED BY DETAIL
5. STEEL GRID PARTITIONS TO BE 3/8" GIB OVER 1/2" STUDS AT 14" OC WITH 5/8" GIB OVER DOOR HEAD AND SOUND BATT FROM FLOOR TO DOOR HEAD (GIB AT ENDS) - PROVIDE 8" PCT BASE AT FINISH AREA AND BRAG FOR 1/4" - REFER TO DET. 38/19/1 AND DET. 38/19/2
6. COORDINATE AND BLOCK CONCRETE SLAB CONTROL JOINTS WITH REINFORC. CT OF EX. FLOOR TIE JOINTS
7. ALL EXTERIOR WALLS TO BE FINISHED AND INSULATED IN ORDER. COORDINATE WITH OWNER FOR COORDINATION FINISHES - CONTRACTOR SHALL COORDINATE WITH OWNER'S EXTERIOR SHEET

1. UNIT 'C' SECOND FLOOR
A3.2 FLOOR PLAN

AT&R
Architectural, Planning & Engineering
5501 GOLDEN VALLEY ROAD
SUITE 300
MINNEAPOLIS, MN 55427
TEL: 763.543.3731
FAX: 763.525.2388
WWW.ATRARCHITECTS.COM

CONSULTANTS
CONSTRUCTION DOCUMENTS

University Avenue Elementary
Classroom Addition and Alterations
Anoka Hennepin School District No. 11
9901 University Avenue
Blaine, MN 55434

SIGNATURE / SEAL
[Signature]
[Seal]
DATE: JANUARY 28, 2016

DESIGNED BY: T.A.P.
CHECKED BY: E.E.A.
CONSTRUCTION DOCUMENTS

ISSUE DATE: JANUARY 18, 2016
SHEET NAME: UNIT 'C' SECOND FLOOR PLAN AND SCHEDULES

AT&AR PROJECT NO: 15080
SHEET NUMBER

A3.2

